

### Application

The 2415SW is an extended low-range system designed for a wide variety of speech and music applications, such as clubs, churches, or concert settings.

### Description

The 2415SW is rectangular in shape with a flat front, facilitating under-stage or hidden application. It is designed to be utilized as a low frequency enhancement to the 2000 series full-range speakers. It can be used for permanent or portable applications.

### Cabinetry

The cabinet design uses a 9 ply 3/4" Birch plywood with dado joints, recessed baffle and a 16 gauge front perforated grill for long lasting durability. The 2000 Series is equipped with two parallel 1/4" jacks and one Neutrik Speakon jack.

### Covering Options

The cabinet is covered by high grade Ozite using waterproof adhesive. It is also available in black or white Duracoat and natural birch finish. \*\*


### Transducers

The cabinet is loaded with four 15" low frequency driver in a tuned enclosure. The cabinet is tuned by means of a vented port set at the optimum frequency.

\*\*Refer to price sheet for upgrade pricing.

### Specifications

<b>Frequency Response:</b>	35hz-600hz
<b>Power Handling:</b>	800w (cont.)
<b>Sensitivity (1 watt/meter):</b>	104dB
<b>Nominal Dispersion:</b>	N/A
<b>Impedance:</b>	8 Ohms
<b>Transducer Components</b>	
Low Frequency:	15" woofer (4)
High Frequency:	None
<b>Audio Input Connections:</b>	2 - 1/4" & 1 - Speakon jack
<b>Enclosure:</b>	Vented
<b>Crossover:</b>	No
<b>High Frequency Protection:</b>	N/A
<b>Steel Pole Mount:</b>	No
<b>Physical</b>	
Dimensions (H x W x D):	21" x 38" x 38.3" (53cm x 96.5cm x 97.2cm)
Weight:	139lbs./63.3 Kg

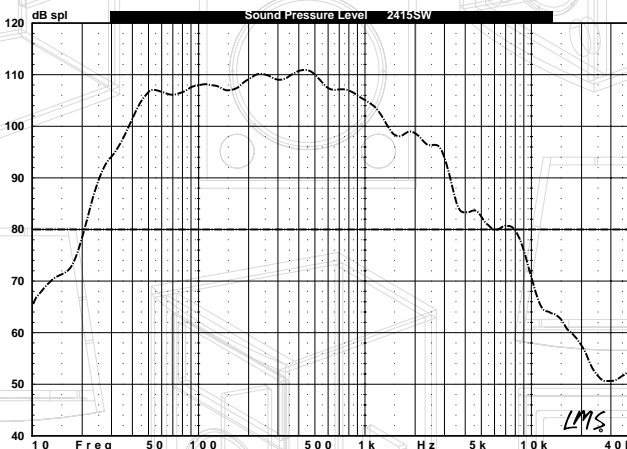

### Warranty Information

The 2000 Series high definition speakers feature a 10 year warranty. Please refer to the warranty information card shipped with all Sound Bridge speaker products.

