

### Application

The 2212HT is a full-range, two-way system designed for a wide variety of speech and music applications, such as clubs, churches, or concert settings.

### Description

The 2212HT is trapezoidal in shape, facilitating cluster or array installations. It can be utilized for permanent or portable applications.

### Cabinetry

The cabinet design uses a 9 ply 3/4" Birch plywood with dado joints, recessed baffle and a 16 gauge front perforated grill for long lasting durability. The 2000 Series is equipped with two parallel 1/4" jacks and one Neutrik Speakon jack.

### Covering Options

The cabinet is covered by high grade Ozite using waterproof adhesive. It is also available in black or white Duracoat and natural birch finish. \*\*

### Transducers

The two-way cabinet is loaded with two 12" low frequency driver and a 1" Titanium high frequency compression driver. The high frequency driver is coupled with a durable ABS horn for proper dispersion. The cabinet is tuned by means of a vented port set at the optimum frequency.


\*\*Refer to price sheet for upgrade pricing.

### Specifications

<b>Frequency Response:</b>	80hz-18Khz
<b>Power Handling:</b>	400w (cont.)
<b>Sensitivity (1 watt/meter):</b>	96dB
<b>Nominal Dispersion:</b>	70v x110h
<b>Impedance:</b>	4 Ohms
<b>Transducer Components</b>	
Low Frequency:	12" woofer (2)
High Frequency:	1" titanium
<b>Audio Input Connections:</b>	2 - 1/4" & 1 - Speakon jack
<b>Enclosure:</b>	Vented
<b>Crossover:</b>	4th Order LR
<b>High Frequency Protection:</b>	Yes
<b>Steel Pole Mount:</b>	No
<b>Physical</b>	
Dimensions (H x W x D):	19.5" x 20" x 38.5" (49.5cm x 50.8cm x 38.5cm)
HT Weight:	73 lbs./33.2 Kg

### Warranty Information

The 2000 Series high definition speakers feature a 10 year warranty. Please refer to the warranty information card shipped with all Sound Bridge speaker products.

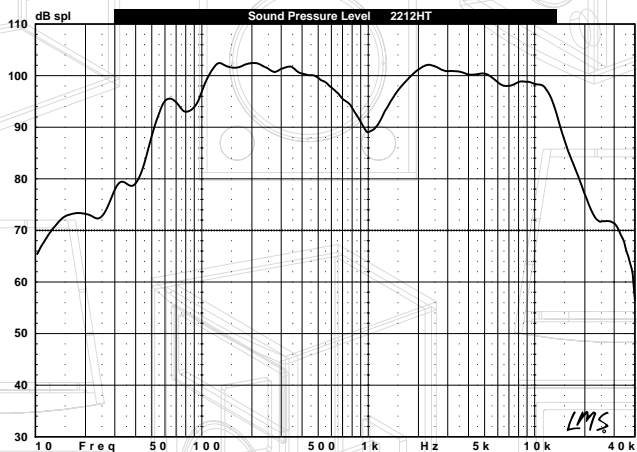

SOUND•BRIDGE

# SB

Acoustic Labs