

Application

The 2112W/Wi is a full-range, two-way system designed for a wide variety of speech and music applications, such as clubs, churches, or concert settings.

Description

The 2112W/Wi is the classic wedge shape used most commonly for permanent or portable floor monitor applications.

Cabinetry

The cabinet design uses a 9 ply 3/4" Birch plywood with dado joints, recessed baffle and a 16 gauge front perforated grill for long lasting durability. The 2000 Series is equipped with two parallel 1/4" jacks and one Neutrik Speakon jack.

Covering Options

The cabinet is covered by high grade Ozite using waterproof adhesive. It is also available in black or white Duracoat and natural birch finish. **

Transducers

The two-way cabinet is loaded with a 12" low frequency driver and a 1" Titanium compression driver(Wi)** or a 1" screw on Motorola Powerline(W). The high frequency driver is coupled with a durable ABS horn for proper dispersion. The cabinet is tuned by means of a vented port set at the optimum frequency.


**Refer to price sheet for upgrade pricing.

Specifications

Frequency Response:	60hz-18Khz
Power Handling:	350w (cont.)
Sensitivity (1 watt/meter):	98dB
Nominal Dispersion:	70v x110h
Impedance:	8 Ohms
Transducer Components	
Low Frequency:	12" woofer
High Frequency:	1" Powerline (W) or 1" titanium (Wi)
Audio Input Connections:	2 - 1/4" & 1 - Speakon jack
Enclosure:	Vented
Crossover:	2nd Order
High Frequency Protection:	Yes
Steel Pole Mount:	No
Physical	
Dimensions (H x W x D):	18" x 18.5" x 28.5" (45.7cm x 47cm x 72.4cm)
W Weight:	36 lbs./16.4 Kg
Wi Weight:	41 lbs./18.7 Kg

Warranty Information

The 2000 Series high definition speakers feature a 10 year warranty. Please refer to the warranty information card shipped with all Sound Bridge speaker products.

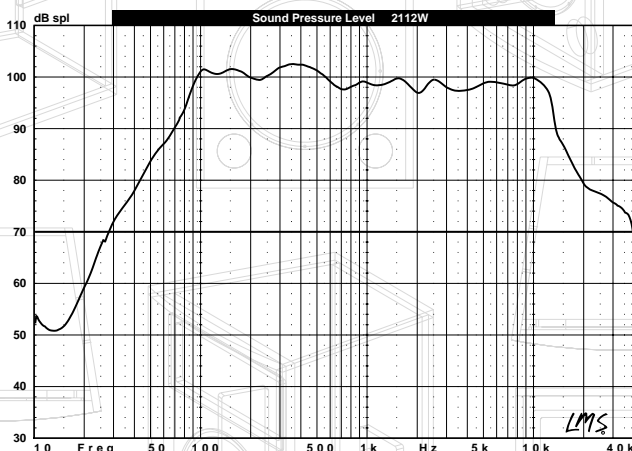

SOUND•BRIDGE

SB
Acoustic Labs